



Product Bulletin for Outlets





Combination Devices





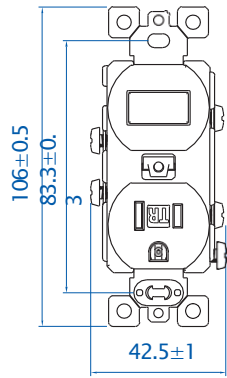

Height	106 ± 0.5 mm
Width	42.5 ± 1 mm
Depth	30.6 ± 1 mm

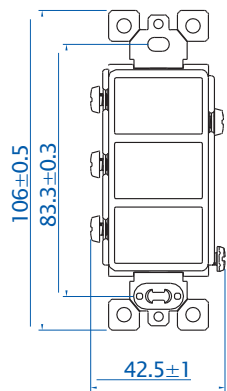



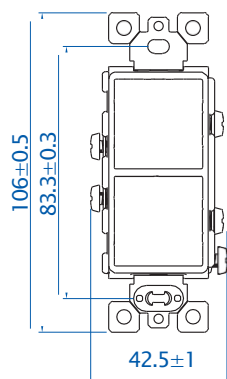


Height	106 ± 0.5 mm
Width	42.5 ± 1 mm
Depth	32.5 ± 1 mm



Height	106 ± 0.5 mm
Width	42.5 ± 1 mm
Depth	34.2 ± 1 mm

Types of Outlets

Combination Devices

Photo	Model	Rating (A. V.)	Description	Wiring Style	NEMA	Certified
	S2C13D	15 120	Single Pole & 3-Way Switch <i>Work with Copper Wire or Copper Clad Wire</i>	Side Wire and Back Wire	/	
	S2C3D	15 120	Two(2) 3-Way Switch <i>Work with Copper Wire or Copper Clad Wire</i>	Side Wire and Back Wire	/	
	S3C1D	15 125	Three(3) Switchs Single Pole <i>Work with Copper Wire or Copper Clad Wire</i>	Side Wire and Back Wire	/	
	S2C1T	15 120	Two(2) Single Pole Switch <i>Work with Copper Wire or Copper Clad Wire</i>	Side Wire and Back Wire	/	
	S2C13T	15 120	Single Pole & 3-Way Switch <i>Work with Copper Wire or Copper Clad Wire</i>	Side Wire and Back Wire	/	
	S2C3T	15 120	Two(2) 3-Way Switch <i>Work with Copper Wire or Copper Clad Wire</i>	Side Wire and Back Wire	/	
	S2C1D	15 120	Two(2) Single Pole Switch <i>Work with Copper Wire or Copper Clad Wire</i>	Side Wire and Back Wire	/	

Part Number Key

Device	Number of Switches	Type	Number of Poles	Style
S = Switch	2 = 2 Switches 3 = 3 Switches	C = Combination	1 = Single Pole 3 = Three Way 13 = Single Pole, Three Way	D = Decorative