

Product Bulletin for Outlets




Outlets



Residential Grade Receptacle



Features and Benefits

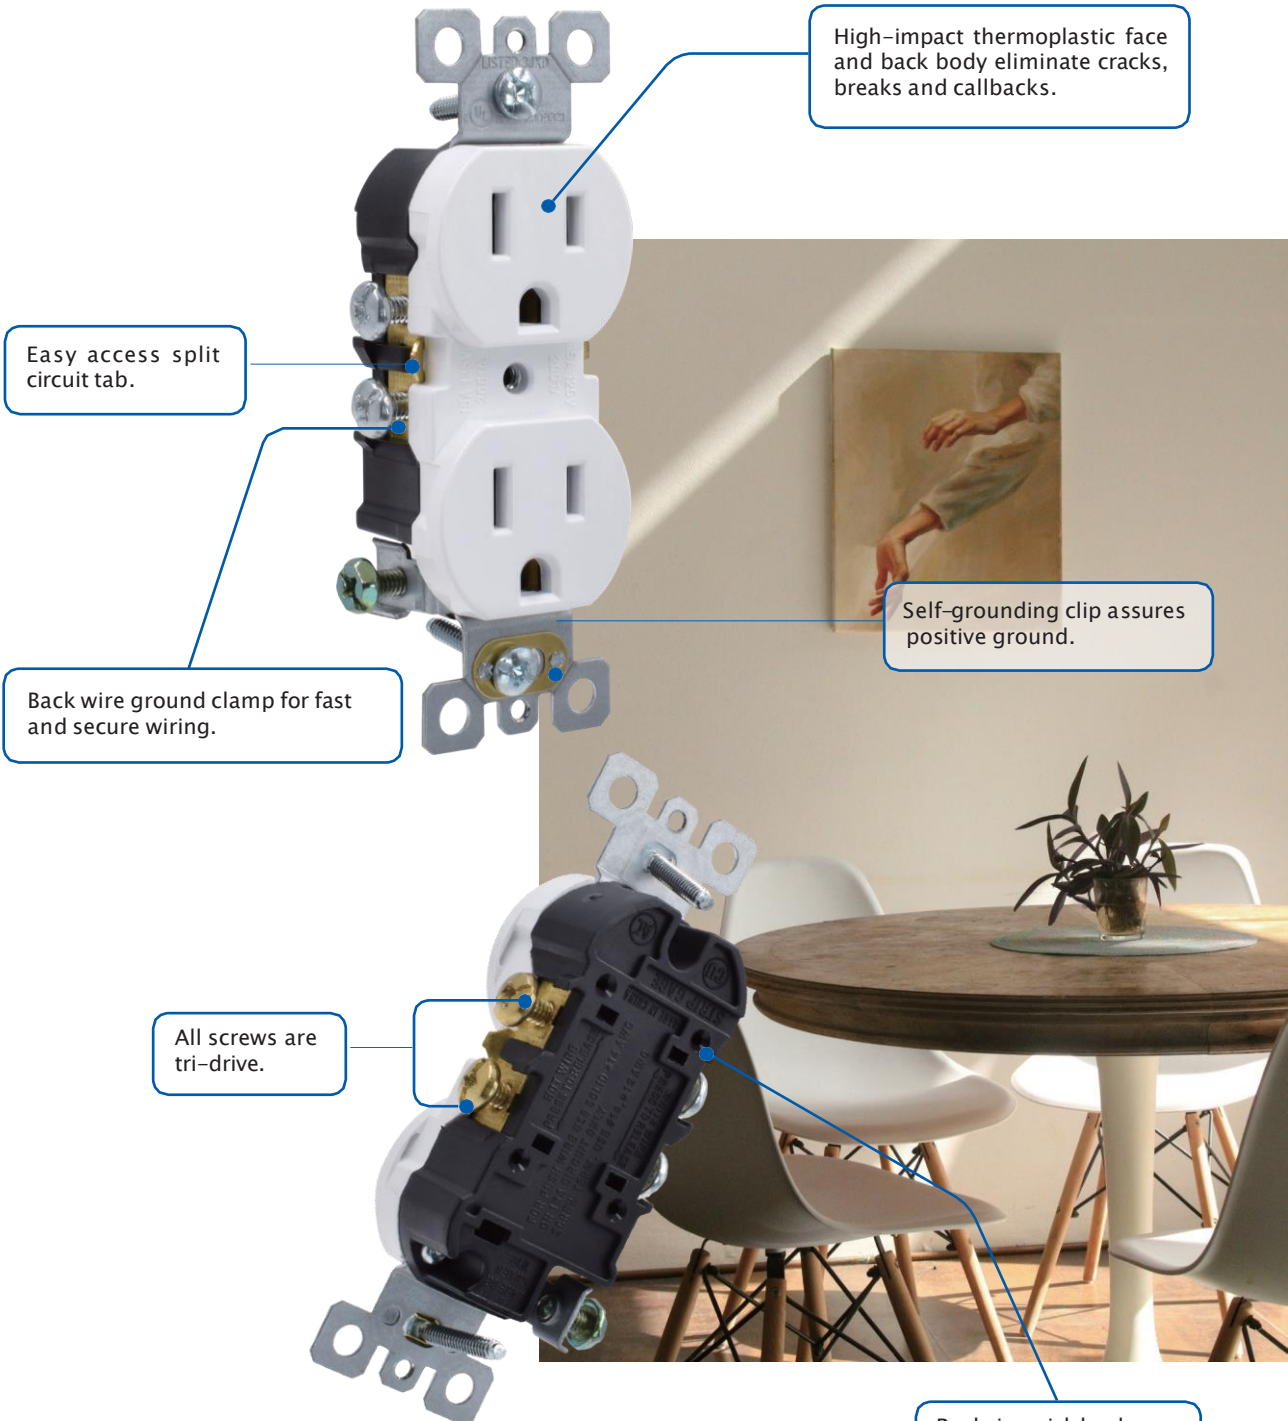



- Meets 2017 NEC requirement for tamper resistant and weather resistant.
- Available in standard duplex style or decorator style.
- Captive mounting screws.
- Push wire accepts #14 AWG solid copper wire only.
- Side and back wire accepts #12- #14 AWG solid.
- High impact-resistant thermoplastic construction.
- Flammability rating is V-2 per UL94.
- Back and side terminal wiring options for ease of installation.
- Self grounding.

Push-in quick back wiring holes allow faster, easier installation.

Dimensional

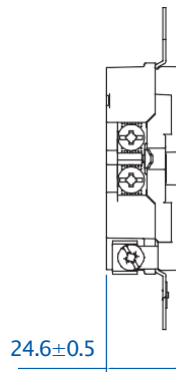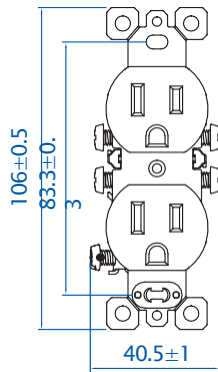

Height	106 ± 0.5 mm
Width	40.5 ± 1 mm
Depth	24.6 ± 0.5 mm

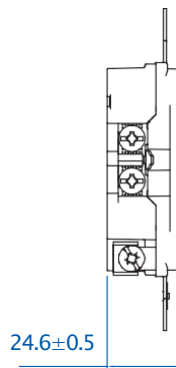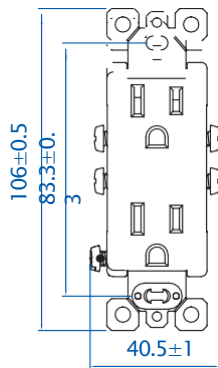








Height	106 ± 0.5 mm
Width	40.5 ± 1 mm
Depth	24.6 ± 0.5 mm

Types of Outlets

Residential Grade - Duplex Receptacles, 2-Pole, 3-Wire Grounding

Photo	Model	Rating (A. V.)	Function	Wiring Style	Grounding	NEMA	Certified
	R2S15	15 125	Standard	Push Wire & Side Wire	Grounding / Self-Grounding	5-15R	
	R2ST15	15 125	TR	Work with Copper Wire or Copper Clad Wire			
	RL2ST15	15 125	TR	Back Wire & Side Wire	Grounding / Self-Grounding	5-20R	
	RL2STW15	15 125	TR&WR	Work with Copper Wire or Copper Clad Wire			
	R2S20	20 125	Standard	Side Wire only	Grounding / Self-Grounding	5-20R	
				Work with Copper Wire or Copper Clad Wire			
	RL2ST20	20 125	TR	Back Wire & Side Wire	Grounding / Self-Grounding	5-20R	
	RL2STW20	20 125	TR&WR	Work with Copper Wire or Copper Clad Wire			

Residential Grade - Decorative Receptacles, 2-Pole, 3-Wire Grounding

Photo	Model	Rating (A. V.)	Function	Wiring Style	Grounding	NEMA	Certified
	R2D15	15 125	Standard	Push Wire & Side Wire	Grounding / Self-Grounding	5-15R	
	R2DT15	15 125	TR	Work with Copper Wire or Copper Clad Wire			
	RL2DT15	15 125	TR	Back Wire & Side Wire	Grounding / Self-Grounding	5-20R	
	RL2DTW15	15 125	TR&WR	Work with Copper Wire or Copper Clad Wire			
	R2D20	20 125	Standard	Side Wire only	Grounding / Self-Grounding	5-20R	
				Work with Copper Wire or Copper Clad Wire			
	RL2DT20	20 125	TR	Back Wire & Side Wire	Grounding / Self-Grounding	5-20R	
	RL2DTW20	20 125	TR&WR	Work with Copper Wire or Copper Clad Wire			

Part Number Key

Device	Conductor Hole Size	Number of Outlets	Style	Tamper Resistant	Weather Resistant	Color
R = Receptacle	(Blank) = Standard L = 10-AWG Compatible	1 = 1 Outlet 2 = 2 Outlets	S = Standard D = Decorative	(Blank) = Not Tamper Resistant T = Tamper Resistant	(Blank) = Not Weather Resistant W = Weather Resistant	WH = White GY = Gray