

## **PRODUCT CATALOG**

Metallic & Non-Metallic Outlet Boxes, Fiberglass Outlet Boxes, Extra-Duty Bubble Covers, Wiring Devices, Building Wire & Structured Cable, and Lighting














# METALLIC & NON-METALLIC OUTLET BOXES





1 Gang Non-Metallic Outlet Box



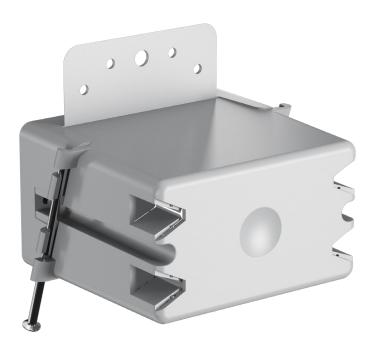

1 Gang Non-Metallic Outlet Box

#### **Product Description:**

1 Gang Non-Metallic Outlet Box

#### **Application:**

Mounts to wooden stud in new work residential applications.

#### Features:


- Nail holders allow for easy install to wooden stud.
- Wall alignment bracket for easy placement and screw holes.
  "V" wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

ltem Code:	LIC-1G
Trade Code:	1 Gang
Volume:	22.5 CU.IN.
Type of Installation:	New Work
Height:	4.16 inches
Width:	3.5 inches
Depth:	3.45 inches






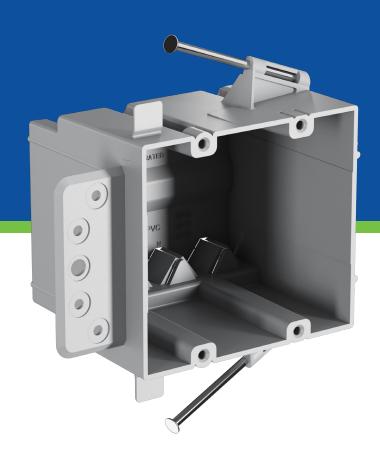

2 Gang Non-Metallic Outlet Box



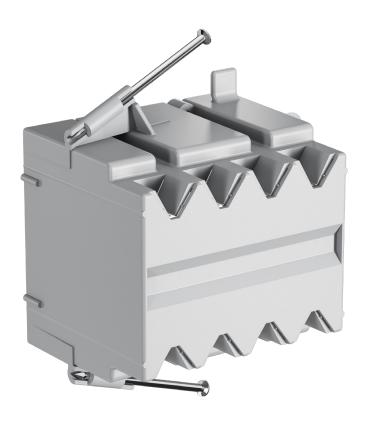

2 Gang Non-Metallic Outlet Box

#### **Product Description:**

2 Gang Non-Metallic Outlet Box

#### **Application:**

Mounts to wooden stud in new work residential applications.

#### **Features:**

- Nail holders allow for easy install to wooden stud.
- Wall alignment tabs for easy placement and screw holes.
- Assisting bracket for added stability.
- "V" wire clamps for securing the wire.
- UL Listed.
- · 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

Item Code:	LIC-2G
Trade Code:	2 Gang
Volume:	36 CU.IN.
Type of Installation:	New Work
Height:	5.81 inches
Width:	5.19 inches
Depth:	3.19 inches










3 Gang Non-Metallic Outlet Box



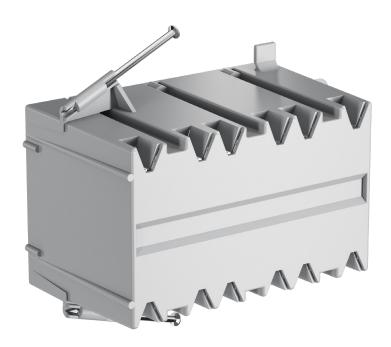

3 Gang Non-Metallic Outlet Box

#### **Product Description:**

3 Gang Non-Metallic Outlet Box

#### **Application:**

Mounts to wooden stud in new work residential applications.

#### Features:

- Nail holders allow for easy install to wooden stud.
- Wall alignment tabs for easy placement and screw holes.
- Assisting bracket for added stability.
- "V" wire clamps for securing the wire.
- UL Listed.
- · 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

Item Code:	LIC-3G
Trade Code:	3 Gang
Volume:	57 CU.IN.
Type of Installation:	New Work
Height:	5.81 inches
Width:	7.14 inches
Depth:	3.48 inches










4 Gang Non-Metallic Outlet Box



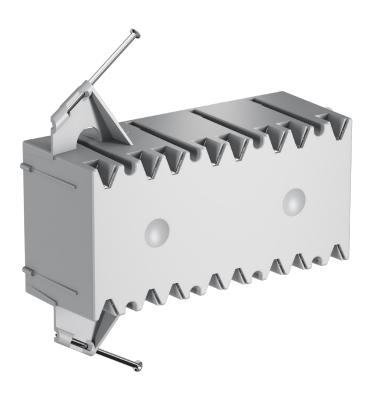

4 Gang Non-Metallic Outlet Box

#### **Product Description:**

4 Gang Non-Metallic Outlet Box

#### **Application:**

Mounts to wooden stud in new work residential applications.

#### **Features:**

- Nail holders allow for easy install to wooden stud.
- Wall alignment tabs for easy placement and screw holes.
- Assisting bracket for added stability
- "V" wire clamps for securing the wire.
- UL Listed.
- · 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.


- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

ltem Code:	LIC-4G
Trade Code:	4 Gang
Volume:	60 CU.IN.
Type of Installation:	New Work
Height:	7.82 inches
Width:	8.88 inches
Depth:	2.77 inches








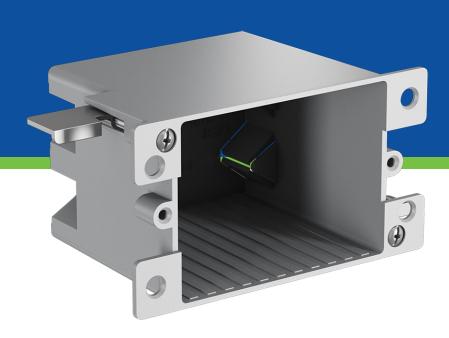

1 Gang Non-Metallic Outlet Box Old Work



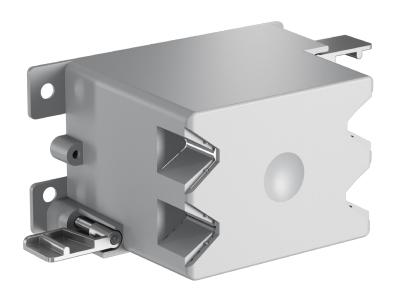

1 Gang Non-Metallic Outlet Box Old Work

#### **Product Description:**

1 Gang Non-Metallic Outlet Box

#### **Application:**

Mounts into a pre-cut hole in old work residential applications.

#### **Features:**

- Mounting tabs for easy install.
- "V" wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.


- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

ltem Code:	LIC-5
Trade Code:	1 Gang
Volume:	14 CU.IN.
Type of Installation:	Old Work
Height:	4.15 inches
Width:	2.26 inches
Depth:	2.80 inches








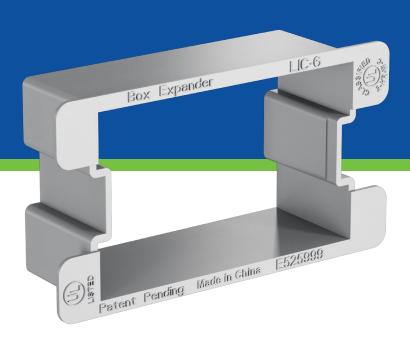

1 Gang Non-Metallic Box Expander



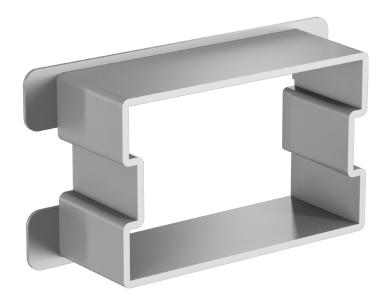

1 Gang Non-Metallic Box Expander

#### **Product Description:**

1 Gang Non-Metallic Box Expander

#### Application:

Slides into 1 Gang New Work Outlet Boxes.

#### **Features:**

- Fits around Dimmers and GFCI Devices.
- Fits into 1 Gang New Work Boxes.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

Item Code:	LIC-6
Trade Code:	1 Gang
Volume:	6 CU.IN.
Type of Installation:	New Work
Height:	4.0 inches
Width:	2.20 inches
Depth:	1.20 inches









4/0 Round Old-Work Ceiling Box





4/0 Round Old-Work Ceiling Box

#### **Product Description:**

4/0 Round Ceiling Box Old Work

#### **Application:**

Mounts into a pre-cut hole in old work residential applications.

#### **Features:**

- Mounting tabs for easy install.
- "V" wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.
- Acceptable for up to 6 lb. fixture support.

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

ltem Code:	LIC-7
Trade Code:	4/0 Round
Volume:	18 CU.IN.
Type of Installation:	Old Work
Height:	2.67 inches
Width:	4.39 inches
Depth:	4.39 inches









4/0 Round Box (Ceiling Box) with Adjustable Bar





4/0 Round Box (Ceiling Box) with Adjustable Bar

#### **Product Description:**

4/0 Round Box (Ceiling Box) with Adjustable Bar

#### Application:

Adjustable ceiling fixture box for new work residential.

#### **Features:**

- With Adjustable Bar.
- "V" wire clamps for securing the wire.
- · UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.
- Acceptable for up to 50 lb. fixture support.


- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

ltem Code:	LIC-8
Trade Code:	4/0 Round
Volume:	20 CU.IN.
Type of Installation:	New Work
Height:	2.30 inches
Width:	4.06 inches
Depth:	4.06 inches







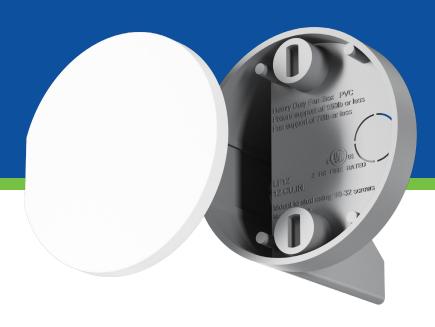

Heavy Duty Fan Box





Heavy Duty Fan Box

#### **Product Description:**

**Heavy Duty Fan Support** 

#### **Application:**

Ceiling Fan Support Mounts to wooden stud.

#### Features:

- For fixture support of 150 lbs or less.
- Acceptable for fan support of 70 lbs or less.
- L-shaped saddle style fan box screws straight to wooden stud using 10-32 screws.
- "V" wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.
- · Wire protecting cap.
- Use provided screws only.

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

ltem Code:	LIC-9
Trade Code:	4/0 Round
Volume:	12 CU.IN.
Type of Installation:	New Work
Height:	4.0 inches
Width:	4.10 inches
Depth:	









Ceiling Fan Outlet Box





Ceiling Fan Outlet Box

### **Product Description:**

Ceiling Fan Outlet Box

#### Application:

Mounts to wooden stud using provided screws.

#### **Features:**

- Rated for up to 35 lb ceiling fan support.
- Rated for up to 50 lb. fixture support.
- "V" wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.
- Use provided screws and washers only.

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

Item Code:	LIC-10
Trade Code:	4/0 Round
Volume:	8 CU.IN.
Type of Installation:	New Work
Height:	1.36 inches
Width:	4.30 inches
Depth:	










4/0 Nail-on Fixture Box



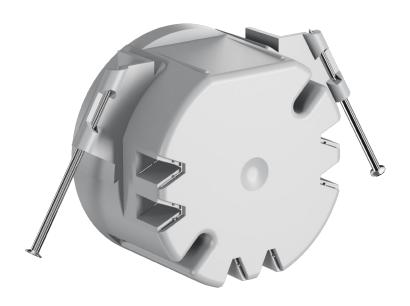

4/0 Nail-on Fixture Box

### **Product Description:**

Ceiling Fan Outlet Box

#### **Application:**

Mounts to wooden stud using provided screws.

#### Features:

- Rated for 35 lbs ceiling fan.
- Rated for 50 lbs fixture weight.
- "V" wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.
- Use provided screws and washers only.

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

Item Code:	LIC-11
Trade Code:	4/0 Round
Volume:	8 CU.IN.
Type of Installation:	New Work
Height:	1.36 inches
Width:	4.30 inches
Depth:	







Metal Fan Support Box





Metal Fan Support Box

#### **Product Description:**

1-1/2" Octagon Ceiling Fan Box with Adjustable Bar

#### **Application:**

Mounts to wooden stud for fan / fixture support.

#### Features:

- Metal support bar extends from 16" to 24".
- · Green bonding screw included.
- Fixture moutning hardware included (10-32 x 1" and 8-32 acceptable).
- Adjustable metal box slides along meatl bar for precise location.
- Three 1/2" knockouts.
- UL 514A, CSA C22.2 Approval.

Item Code:	LIC-12
Trade Code:	4 inches
Volume:	15.8 CU.IN.
Type of Installation:	New Work
Diameter:	4 inches
Length:	24 inches

#### **Certifications:**

UL Listed to UL 514A



# **Packaging & Shipping Information**

ltem #	Carton (L) in.	Carton (W) in.	Carton (H) in.	Quantity per Carton (PCS)	Quantity of Cartons per 40HQ	Quantity per 40HQ (PCS)
LIC-1G	21.25	12.99	18.50	100	760	76000
LIC-2G	24.40	21.25	16.93	100	480	48000
LIC-3G	26.57	16.14	18.70	60	465	27900
LIC-4G	27.16	17.32	14.96	40	570	22800
LIC-5	19.29	18.70	15.35	200	701	140200
LIC-6	20.47	17.72	13.98	400	805	322000
LIC-7	20.47	16.73	14.96	100	840	84000
LIC-8	22.05	14.96	12.20	60	1008	60480
LIC-9	21.65	17.72	15.35	120	670	80400
LIC-10	22.24	17.72	12.20	200	840	168000
LIC-11	23.62	18.11	15.15	90	741	66690
LIC-12	22.05	15.35	5.70	12	1930	23160









